

DHI-NVR608-32-4KS2

32 Channel 2U 8HDDs Ultra series Network Video Recorder



Series Overview

Dahua's next generation network video recorder offers unparalleled recording technology for IP video surveillance applications. For applications where details are critical for identification, this enterprise-level NVR provides a powerful Intel processor with up to 4K resolution. Additionally, the NVR features a mouse shortcut operation menu, remote management and control, centre storage, edge storage, and back up storage.

This NVR is ideal for a wide range of applications such as public safety, transportation stations, government institutions, hotel resorts, shopping malls, city centers, and financial institutions, where demand expansion flexibility, high reliability and centralized storage management.

The NVR is compatible with numerous third-party devices making it the perfect solution for surveillance systems with or without a video management system (VMS). Its open architecture supports multi-user access and is compatible with ONVIF.

Functions

Perimeter Protection by Camera

Automatically filtering out false alarms caused by animals, rustling leaves, bright lights, etc. Enables system to act secondary recognition for the targets. Improving alarm accuracy.


SMD Plus by Camera

With intelligent algorithm, Dahua Smart Motion Detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.

Video Metadata by Camera

With deep learning algorithm, Dahua Video Metadata technology can detect, track, capture vehicle, non-motor vehicle and people, and select the best images, and extract attributes.

- New 4.0 user interface
- 16-channel decoding@1080p (30 fps); self-adaptive decoding capability
- Access, storage or forwarding at 384 Mbps
- Simultaneous video output for VGA and HDMI1; 4K heterogeneous output for the 2 HDMI ports
- Multiple data mode such as Raid0, Raid1, Raid5, Raid6, and Raid10
- Remote configuration and management of IPCs, such as setting parameters, acquiring information and upgrading IPCs of the same model in batches
- AI-by-camera functions such as perimeter protection, face detection and recognition, SMD Plus, video metadata, ANPR and 3D behavior analysis
- N+M cluster. When the host fails, the standby device will continue to record; once the host recovers, video recorded on the standby device will be transmitted back

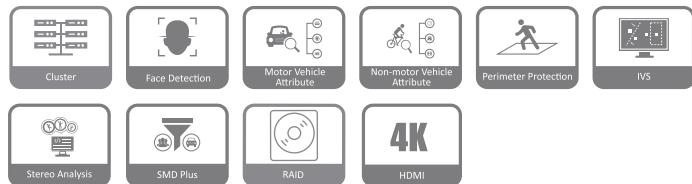

ANPR by Camera

With deep learning algorithm, Dahua ANPR technology can recognize the number plate information of vehicles in the image with ANPR cameras. Support block/allowlist mode, searching target vehicles from recorded video.

Stereo Analysis by Camera

With deep learning algorithm and scene 3-dimensional information, Dahua Stereo Analysis technology can recognize people's behaviors, such as fall detection, violence detection, strand detection, and space exception, and then generates alarm signals and triggers linkage.

N+M Hot Standby

The highly reliable redundancy N+M Hot Standby design provides a secure, failover technique ensuring immediate backup. In the event of a system failure, the sub instantly takes over the main ensuring no data is lost.

RAID

Support RAID 0, RAID 1, RAID 5, RAID 6, RAID 10 (optional). It can improve your storage speed, while ensuring data security.

Technical Specification		Third Party Camera Access	Panasonic, Sony, Samsung, Axis, Pelco, Arecont, Onvif, Canon and more
System		Compression	
Main Processor	Industrial embedded micro-processor	Video	Smart H.265+/H.265/Smart H.264+/H.264/MPEG4/MJPEG
Operating System	Embedded Linux	Audio	MP2/G726/G729/G722/G723/G711A/G711U/PCM
Operation Interface	Web/local GUI	Network	
Perimeter Protection		Network Protocol	HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, SNMP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, IP Search (Support Dahua IP camera, DVR, NVS, etc.), P2P, iSCSI
Performance	24 channels	Mobile Phone Access	iOS, Android
AI Search	Search pictures by channel, time, event type	Interoperability	ONVIF (profile T/S/G), CGI, SDK
Face Detection By Camera		Browser	Chrome, IE9 or later, Firefox
Performance	24 channels	Record Playback	
Face Attributes	6 attributes: Gender, age, glasses, expression, mouth mask, and beard	Multi-channel Playback	1/4/9/16
AI Search	Search pictures by channel, time and face attributes	Record Mode	Manual, Schedule (General, MD (Motion Detection), Alarm, MD & Alarm, Intelligent, POS)
SMD Plus By Camera		Storage Method	Local HDD and network
Performance	32 channels	Backup	Hard drive, USB device, eSATA device
AI Search	Search by target classification (Human, Vehicle)	Playback Function	1. Play, pause, stop, fast forward, fast backward, rewind, play by frame 2. Full screen, backup (cut/file), partially enlarge, audio on/off
Video Metadata By Camera		Storage	
Performance	12 channels	Disk Group	Support
Human Body	Top, top color, bottom, bottom color, hat, bag, gender, age, umbrella	Raid Support	RAID 0/1/5/6/10
Vehicle	Plate No., type, color, vehicle type, logo, plate color, ornament, calling, seatbelt, region	Alarm	
Non-motor Vehicle	Type, color, number of passengers, helmet	General Alarm	Motion detection, privacy masking, video loss, local alarm, PIR alarm, IPC alarm
AI Search	Support search target video by metadata	Anomaly Alarm	Camera offline, storage error, full storage, IP conflict, MAC conflict, login lock, network security anomaly
ANPR By Camera		Intelligent Alarm	Perimeter protection, face detection, face recognition, SMD, video metadata (human, motor-vehicle, non-motor vehicle), ANPR, people counting, stereo analysis, crowd distribution, heatmap, video quality diagnosis
Performance	8 channels	Alarm Linkage	Record, snapshot, IPC external alarm output, buzzer, log, preset, email
Stereo Analysis by Camera		External Port	
Performance	32 channels	Audio Input	1 channel, RCA connector
AI Search	Search by target classification (Fall Detection, People Approach Detection, People No. Exception Detection, People Staying Detection, Violence Detection)	Audio Output	1 channel, RCA connector
Video		HDD	8 SATA III ports, up to 10 TB for a single HDD. The maximum HDD capacity varies with environment temperature.
Access Channel	32	Alarm Input	16 channels
Network Bandwidth	384 Mbps for access, 384 Mbps for storage and 384 Mbps for forwarding	Alarm Output	8 channels
Resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/960p/720p/D1/CIF/QCIF	eSATA	1 eSATA
Decoding Capability	16-ch@1080p (30 fps)		
Video Output	VGA: 1920 × 1080, 1280 × 1024, 1280 × 720 HDMI1/HDMI2: 3840 × 2160@30 fps, 3840 × 2160@25fps, 1920 × 1080, 1280 × 1024, 1280 × 720 1 channel VGA output, 2 channels HDMI output, VGA and HDMI 1 homologous output, double HDMI heterogeneous output. Support 4K display for both HDMI1 and HDMI2		
Multi-screen Display	1st Screen: 1/4/8/9/16/25/36 2nd Screen: 1/4/8/9/16		

RS-232	1 channel, used to debug and pass through serial data
RS-485	1 channel, used to control PTZ, and it supports multiple protocols
USB	2 front USB 2.0 ports, 2 rear USB 3.0 ports
Network	2 RJ-45 10/100/1000 Mbps self-adaptive Ethernet ports

General Parameter

Power Supply	Single, AC100V–240V, 50–60 Hz
Power Consumption	< 20 W (Without HDD)
Net Weight	9 kg (19.8 lb) (Without HDD)
Gross Weight	10.5 kg (23.1 lb) (Without HDD)
Product Dimensions	440 mm × 452.6 mm × 94.9 mm (W × L × H) 17.32 inch × 17.82 inch × 3.73 inch (W × L × H)
Package Dimensions	571 mm × 571 mm × 225 mm (W × L × H) 22.48 inch × 22.48 inch × 8.86 inch (W × L × H)
Operating Conditions	−10°C to +55°C (+14°F to +131°F), +35°C (+95°F) when raid enabled
Storage Conditions	0°C to +40°C (+32°F to +104°F)
Operating Humidity	10%–93% (RH)
Storage Humidity	30%–85% (RH)
Operating Altitude	3000 m (9843 ft)
Certifications	CE: EN55022, EN55024, EN50130-4, EN60950-1 FCC: Part 15 Subpart B, ANSI C63.4-2014 UL: UL 60950-1 and CAN/CSA C22.2 No.60950-1

Ordering Information


Type	Model	Description
32 Channel NVR	DHI-NVR608-32-4KS2	32 Channel Ultra Series 4K H.265 Network Video Recorder
Accessories	ESS1504C	4 HDDs eSATA Storage (Please confirm with Technical Support for HDD capacity & compatibility)

Accessories




ESS1504C
4 HDDs eSATA Storage (Please confirm with Technical Support for HDD capacity & compatibility)

Dimensions (mm[inch])

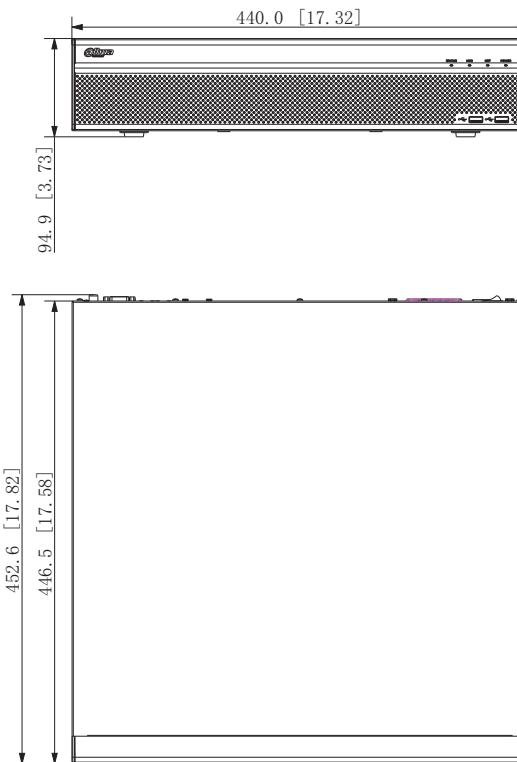

Panels

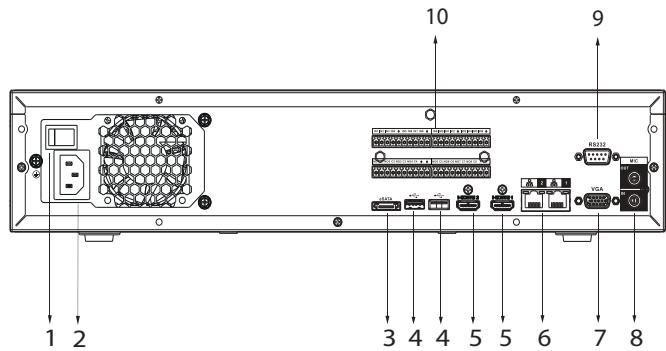

1	Power Switch	2	Power Input
3	eSATA Port	4	USB Ports
5	HDMI Ports	6	Network Ports
7	VGA Port	8	AUDIO IN/OUT, RCA Connector
9	RS-232 Port	10	Alarm In/Out